

Nomadic Instand

Nomadic Display

 **Nomadic**  **Instand**[®]  


Owners **Guide**

Nomadic  **Display**[®] 




Setting Up Your Display is as Easy as 1-2-3


Opening Your Case:




Rolluxe Case: To open lid set your combination at "000" or your own personal combination. For instructions on setting a new combination, refer to the case section of this guide.



Press red button and lift latch to release side latches and remove the top.

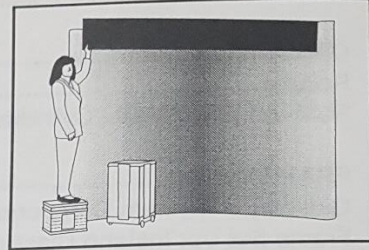

Rolluxe Case top serves as a built-in step stool to facilitate hanging graphics.



RollEase, Cylindrical or ShowMate Case: Unlatch the buckles and lift off the lid for easy unpacking.


REMEMBER –

Read the complete instructions about your Instand product before assembling. If you need additional assistance or have any questions, please call the nearest Nomadic LifeLine.


Setting Up Your Instand Frame:



Place frame with red studs facing front on the floor.

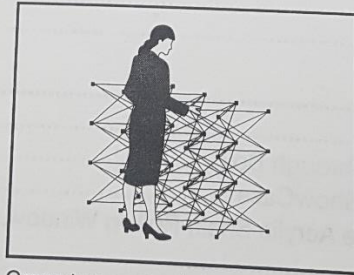

Grasp two center hubs and lift frame open to shoulder height. Handle frame at hubs.

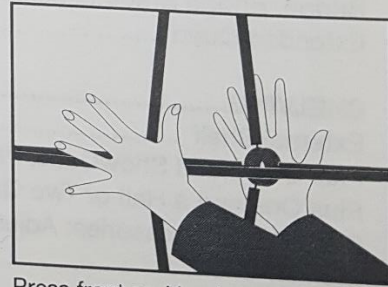

Press front and back hubs in the center of the frame until Instand locks into position. (Front and back hubs do not meet.) *


***Note:** Once frame is expanded, the row of red hubs (or red studs) should be on the floor facing forward.

دى صور تبين شكل النوماديك وهو فى قلب العلبه ، وكيفية مسكه / وكيفية فتحة ، وفتحة فى آخر صورة .


Setting Up Your Display is as Easy as 1-2-3

Instand Lights are UL or ETL approved


Covering Your Instand with Fabric or Graphics:

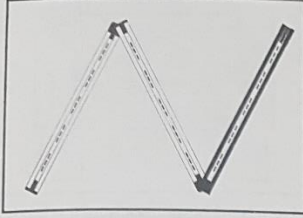


Unfold connected strut . . .




...and connect bottom two sections by joining as illustrated.

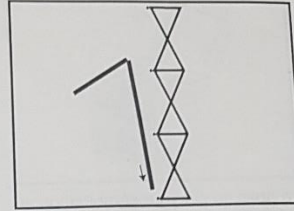


Slide bottom of connected strut onto the stud at the bottom of the frame.




Snap next two connectors onto studs on frame.




Attach lights to top of struts. Swivel fixtures to adjust position. Run cord behind display.




Rotate top section of strut up and slide down onto top stud.




Install ShowCases, external shelf brackets and bridge braces before hanging fabric. For detailed instructions on ShowCases or external shelves, refer to the shelving section of this guide.




Hang all top panels and full size panels first. Lift onto studs atop frame. Hook one side then the other. Gradually release downward to bond magnets.




For end caps and connecting panels bow panel. Lift onto studs atop front and back sides of frame. For hinged panels hook one side and then the other. Slide hands along length of panel to bond magnets.



To hang top panels for ShowCases or light boxes, gradually release downward to bond magnets. Tuck bottom edge of top fabric panel into lip of shelf. To hang bottom panels, tuck fabric under shelf first.



Install bridges between two displays or a display and a column. For detailed instructions on bridges, refer to the frame extensions section of this guide.




Hang headers, HeadLiner, or Velcro® graphics last. For detailed instructions on HeadLiner, refer to the lighting section of this guide.

Nomadic Display®


وهذه الصور تبين الملحقات له ، وكيفية تركيبها ، ووضع البوستر عليه ، وارتفاعه بالنسبة لارتفاع الانسان

Frame Set Up


Instand Classic Frames come in different sizes:




2x2 Classic Frame
5'x5' / 1.5 x1.5m




2x3 Classic Frame
5'x8' / 1.5x2.4m




3x2 Classic Frame
8'x5' / 2.4x1.5m



3x3 Classic Frame
8'x8' / 2.4x2.4m



3x4 Classic Frame
8'x10' / 2.4x3.0m




3x8 Classic Frame
8'x20' / 2.4x6.0m


Instand Plus Frames come in different sizes:



3x1 Plus Frame
or 3x1 Plus Wing Frame
8'x2.5' / 2.4x0.8m



3x2 Plus Frame
8'x5' / 2.4x1.6m




3x3 Plus Frame
8'x8' / 2.4x2.4m


All Instand Frames set-up the same way:



Place frame on floor with red studs facing front.



Grasp two center hubs and lift frame open to shoulder height. Handle frame at hubs.



Press front and back hubs in the center of the frame until Instand locks into position. (Front and back hubs do not meet.) *


*Note: Once frame is expanded, the row of red hubs (or red studs) should be on the floor facing forward.

Nomadic  **Display**®


هذه الصور تبين النوماديك وهو مفتوح ، وامكانية وضع اثنين بجوار بعضهما ، وكيفية فتحه

Connected Struts with or without Lights


Instand Lights are UL or ETL approved

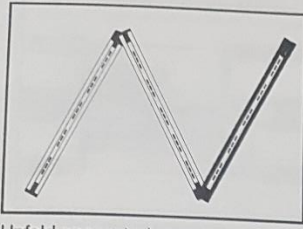


Unfold connected strut . . .




...and connect bottom two sections by joining as illustrated.

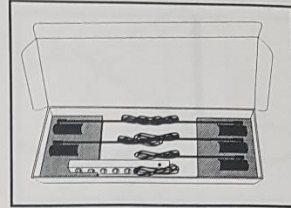


Unpack lights and ElectroStrut from this carton...




...or this carton.

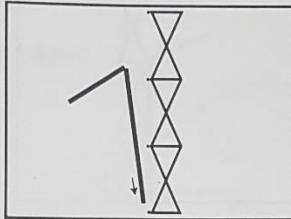


Slide bottom of connected strut onto the stud at the bottom of the frame.




Snap next two connectors onto studs on frame.




Attach lights to top of struts. Swivel fixtures to adjust position. Run cord behind display.




Rotate top section of strut up and slide down onto top stud.

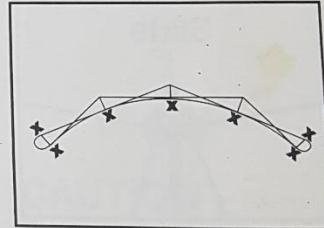

Attach struts to front and rear sides of curved frames.

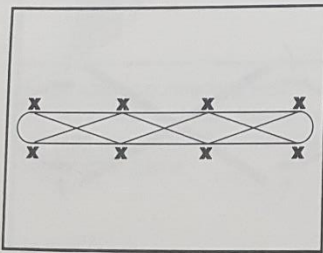

Attach struts to front and rear of straight frames.



Plug light cords into ElectroStrut power outlet strip. Use power switch to turn all lights on and off.

CAUTION –
Fixtures become hot with use — handle with care.


In North America order 5 amps of single phase 120v electrical service for your Light Set.

In Europe order 5 amps of Double phase 220 - 240v electrical service for your Light Set.

Nomadic  **Display**®

هذه الصور تبين الجريدة المغناطيسية ، وشكلها ، وكيفية تركيبها ، والمساقط الأفقى والجانبى للنوماديك ، وتركيب الاضاءة فيه

Glossary of Panels

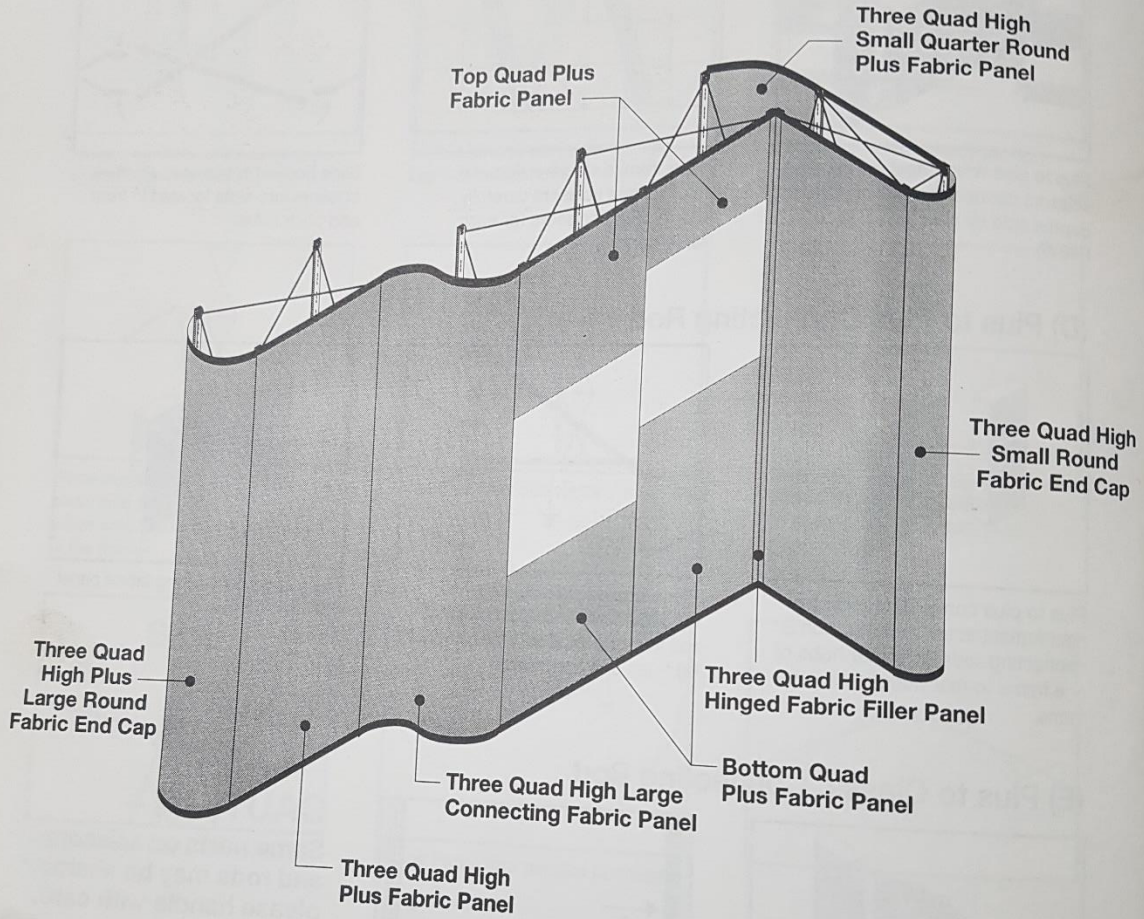

NOTE: Plus panels have metal bars on the back at the top and bottom.
Classic panels have no bar.

Nomadic  **Display**®

هذه الصورة تبين النوماديك وهو منصوب وعلية البوست كاملا في صورة منظور

المطلوب عمل سيرش كامل عن الموضوع ، كما نفذ ذلك في الميرو سيستم ، وذلك من خلال عمل بور بوينت من خلال مجموعات ، وبعثه قبل يوم الأربعاء ، وذلك لتصححة وتجميعه في بور واحد كما نفذ ذلك من قبل .